



Global Mining Products



The new line of Digital B-RAD tools is the world's first digital, cordless, and lithium-ion torque wrench. With digital display and single increment torque settings. The color screen with keypad provides unmistakable visual LED indicator lights. Featuring integrated calibration, a lithium ion battery and a dual scale reading: ft.lbs and nm.

DIGITAL and PROGRAMMABLE Pistol Grip Torque Wrenches.

Ideal for applications where compressed air or electricity is not readily available.

Unmatched power, VERSATILITY, and reliability in a lightweight portable tool.

Stall type tool capable of accuracy of +/- 5% & repeatability of +/- 2%.

Please contact us today to arrange an on-site demonstration!

Toll Free 877-576-2855

DB-RAD Digital Battery Powered Torque Tool

The World's First Digital and Programmable Pistol Grip Torque Wrench. The DB-RAD-1350 digital battery powered torque wrenches are ideal for any application, especially where compressed air or electricity are not available.

**Just imagine the freedom...
No Air Lines! No Power Cords! No Hassles !**



DB-RAD 1350 Digital Battery Series Torque Tool


Part No.	Drive Size	Torque (Low- High)	RPM	Weight (kgs)	Noise Level
RAD-16831	0.75"	375 - 1350 Nm	12	5.2	80 db



All DB-RAD 1350 Torque Tools come fully calibrated complete with:

- DB-RAD 1350 Torque Tool
- Operators Manual
- Calibration Chart
- Reaction Arm and Retention Ring
- Weatherproof Storage Case
- Battery Charger p/n: RAD-16091
- (2) 18 Volt Lithium Ion Batteries p/n: RAD-18795

To ensure the highest quality of measurement and accuracy, each DB-RAD Digital Battery Torque Wrench comes individually calibrated traceable to NIST standards.

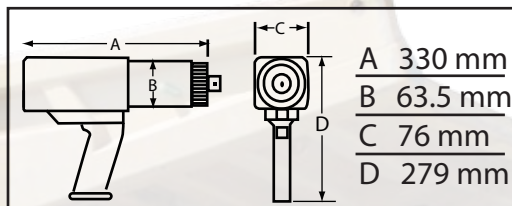

RAD-13366	RAD-13367	RAD-13368	RAD-13364	RAD-13365	RPT-12733

ALSO AVAILABLE FROM GLOBAL MINING PRODUCTS



ELECTRIC SERIES

Torque Range
150 - 3100 Nm

- ✓ Quick adjust torque settings
Fast and accurate "dial a torque" for maximum versatility and efficiency.
- ✓ Soft-start vary speed trigger
Allows operator to safely and quickly set reaction arm before full torque is applied.
- ✓ Equal power in forward and reverse
Convenience and cost effective use of same tool for break away and final torque.
- ✓ Advanced ultra-durable electric motor design
Extreme duty designed to reduce maintenance cost and increase reliability.



DIGITAL ELECTRIC

Torque Range
550 - 3400 Nm

- ✓ Ideal for applications where compressed air or electricity is not readily available.
- ✓ DIGITAL display with colour screen
- ✓ Single Increment digital torque settings
- ✓ Fully programmable preset torque settings
- ✓ Advanced durable electric motor design



BATTERY SERIES

Torque Range
135 - 1750 Nm

- ✓ Unmatched power, VERSATILITY, and reliability in a lightweight portable tool.
- ✓ Ideal for applications where compressed air or electricity is not readily available.
- ✓ Offered in both single speed and high speed models.
- ✓ Stall type tool capable of accuracy of +/-10%, and repeatability of +/-2%.
- ✓ Quick Grip adjustable torque settings on all torque wrenches.
- ✓ Precision adjustable posi-clutch for accurate torque output.



ELECTRONIC SERIES

Torque Range
135 - 8100 Nm

- ✓ Push-button select torque
Fast and convenient error-free digital single increment torque setting.
- ✓ Extremely low noise level only 75db
World's quietest extreme torque gun, ideal for sensitive environments and standards
- ✓ Data collection capability
All E Series tools come with data collection software allowing traceability of each torque sequence performed
- ✓ LED Green (Pass) or Red (Fail) indicator lights



PNEUMATIC SERIES

Torque Range
150 - 11500 Nm

- ✓ PATENTED planetary gear reduction
Delivers one of the highest power-to-weight ratios of any pneumatic controlled bolting system
- ✓ Smooth continuous flow of controlled torque
Eliminates destructive hammering
- ✓ Lightweight ergonomic pistol grip design
Reduces operator strain and injury; resulting in increased productivity
- ✓ Unmatched reliability and quality
Delivered by one of the most advanced engineered gear boxes on the market