

# MAKING OTHER TORQUE SYSTEMS OBSOLETE

Ventilation Slots Located on the Top and Sides of the E-RAD Providing Air Ventilation Exhaust.

Integrated LED Ready / Failed / Passed Lights Top Mounted for Superior Visibility

Aluminum Housing Ensures Minimal Weight Addition to the Tool.

Super Duty Fan (41 CFM) Mounted at the Rear of the E-RAD. Drawing in Cooler Ambient Air. (\*\* For Use with the ERAD 2000, 3000, 4000 & 6000 only)

## E-RAD ELECTRONIC SERIES TORQUE TOOLS

Available in several models with torque ranging from 300-6000 ft.lbs., our E-RAD electronic series pistol-grip torque wrenches are lighter, faster, quieter, and more reliable than other conventional means of bolting. Accurate to +/- 3%\*, this patented tool ensures that each bolt will be tightened to exacting standards.

### LIGHTER

With unsurpassed power-to-weight ratio and the convenience of a lightweight ultra-durable portable carrying case, the E-RAD torque system eliminates the need to move heavy hydraulic pumps reducing operator fatigue.

### FASTER

Compared to other conventional torque systems, such as hydraulic wrenches, the E-RAD electronic torque system decreases tightening times by up to 60% through the delivery of continuous torque, boosting your productivity dramatically and increasing the speed of job completion.

### QUIETER


The E-RAD electronic torque system operates at 75 db reducing the noise level considerably from other traditional torque systems. Along with exceptionally low vibration levels and its pistol grip style design, the E-RAD makes ergonomic sense.



**GLOBAL MINING PRODUCTS**  
Quality, Service, Value

## Electronic Series (E-RAD)

| Part No.  | Tool Model | Drive Size | Torque (Low- High) | RPM | Weight    | Noise Level |
|-----------|------------|------------|--------------------|-----|-----------|-------------|
| RAD-12312 | E-RAD 700  | 0.75"      | 300 - 700 ft/lbs   | 20  | 12.0 lbs  | 75db        |
| RAD-12313 | E-RAD 1200 | 1.0"       | 300 - 1200 ft/lbs  | 16  | 15.0 lbs  | 75db        |
| RAD-12314 | E-RAD 2000 | 1.0"       | 500 - 2000 ft/lbs  | 7   | 18.0 lbs  | 75db        |
| RAD-12703 | E-RAD 3000 | 1.0"       | 500 -3000 ft/lbs   | 5.5 | 23.5 lbs  | 75db        |
| RAD-13992 | E-RAD 4000 | 1.5"       | 800 - 4000 ft/lbs  | 3.5 | 31.0 lbs  | 75db        |
| RAD-13173 | E-RAD 6000 | 1.5"       | 1000 - 6000 ft/lbs | N/A | 50 .0 lbs | 75db        |

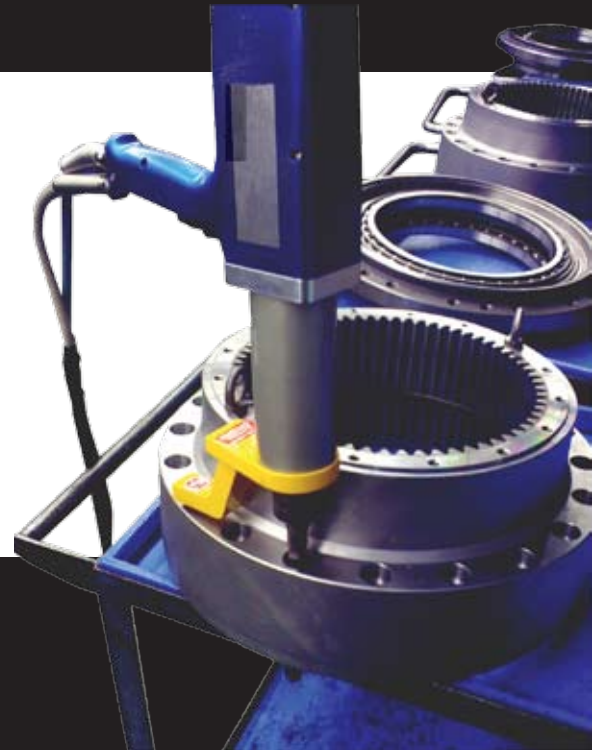

For more information about the E-RAD torque system, please call **1-877-576-2855** or visit [www.globalminingproducts.com](http://www.globalminingproducts.com)



Available in two case configurations

All E Series tools come fully calibrated complete with:

- E-RAD Tool
- Reaction Arm and Retention Ring
- Controller cables
- Digital Torque Controller
- Operators manual
- E-RAD CAL Calibration Software